


RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.

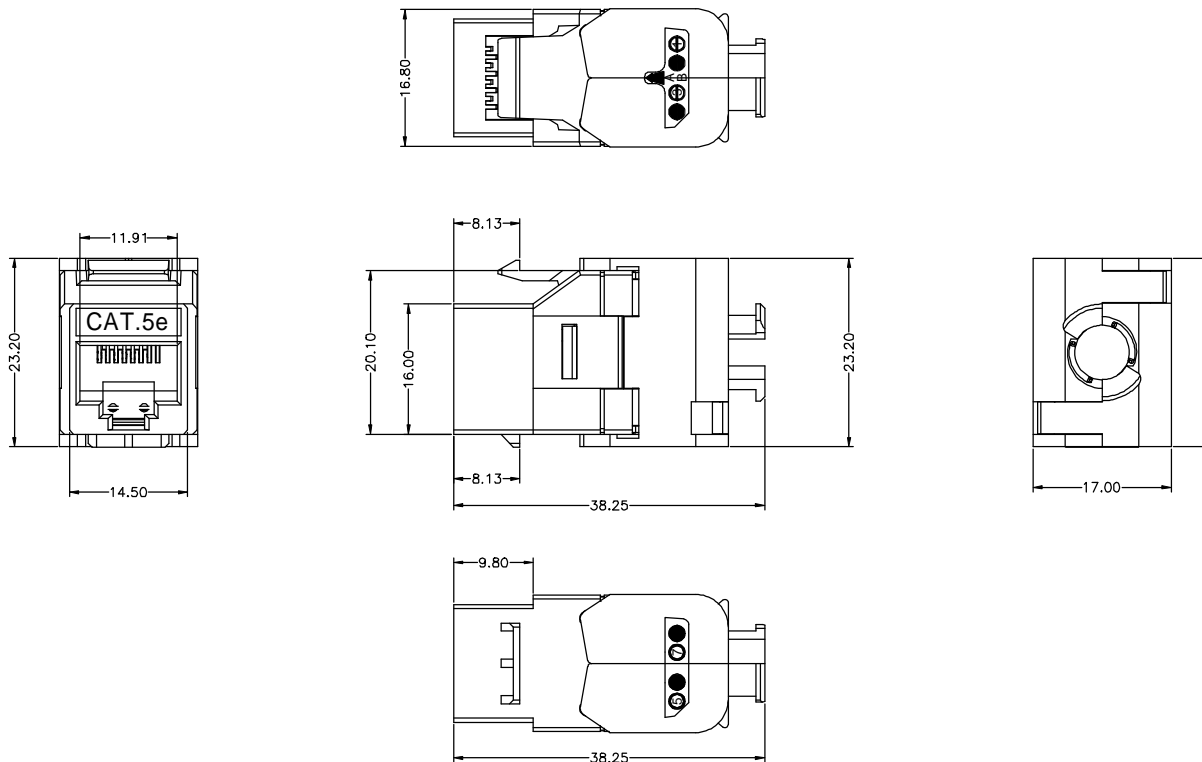

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 100 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 750 VAC 60Hz, 1 MIN.
- 6. CONFORM TO ANSI/TIA/EIA-568 B.2-1

MECHANICAL:

- 1. HOUSING MATERIAL : PC UL94V-0
 - 2. INSERT MATERIAL : PBT+30%GF. UL94V-0
 - 3. PCB MATERIAL : FR-4 THICKNESS 1.6 mm
 - 4. CONTACT MATERIAL : PHOSPHOR BRONZE STAMP PIN t=0.35 mm
 - 5. IDC CONTACT MATERIAL : PHOSPHOR BRONZE t=0.50 mm WITH NICKEL PLATING
 - 6. WIRE : #24~26 AWG
- ENVIRONMENTAL:
 1. STORAGE : -40°C TO +85°C.
 2. OPERATION : 0°C TO 70°C.

CONFORMING TO TIA/EIA 568B
MATFS WITH MODULAR PLUG CONFORMING TO TIA-1096-A.

	0066000	NEW DESIGN	HENRY	071817'
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
	Dimension Range	Tolerance	1/1	APPROVED
	X.X	±0.20	UNIT	SHEET 1/1
	X.XX	±0.15	mm	
X.XXX	±0.10	SIZE		
ANGLE		±5°	A3	
Material/Plated/Notes		NAME		
SEE NOTE		180° CAT5E KEYSTONE JACK		
Tooling No.	PART NO.	326I-00I2-05	REV.	
	DOC. NO.		0	